


型號	Type	RC-102
工作電壓	Power Supply	5~240V AC/DC
消耗電流	Current Consumption	20mA Max.
消耗功率	Power Consumption	DC:8W AC:10VA
殘留電壓	Voltage drop	2V Max
反應時間	Response time	10ms
使用周圍溫度	Operating Temperatuer	-10oC to +60oC
輸出方式	Output	NO & NC
保護等級	Degree of protection	IP 67
出線方式	Cable type	2M Dia :3.8mm 0.34mm <sup>2</sup> /2c
外殼材質	Housing material	耐酸鹼材質HOUSNG :AC D AND DASE-PROOF
電線材質	Wiring material	PVC耐油電線 PVC Oil resistance
重量	Weight	
外觀尺寸	Dimension	

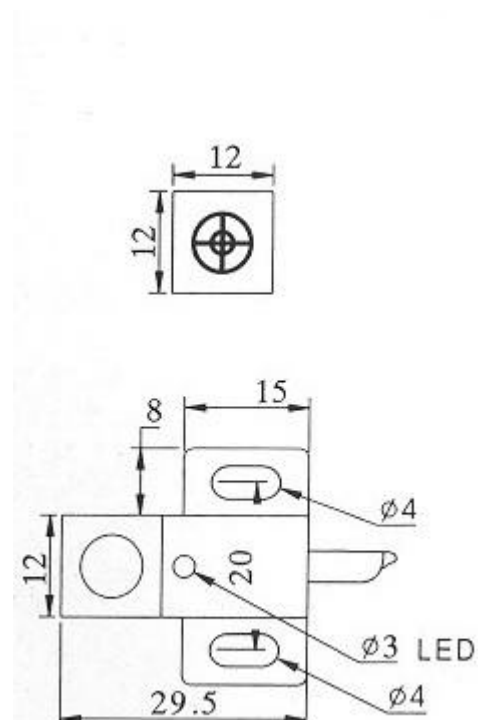

#### RE CHENG HSU AUTOMATIC INDUSTRIAL CO.,LTD

Address:NO.10.Lane 271,sec. 2 Pingdong Road.,  
Pingjhen City,Taoyuan County 324,Taiwan(R.O.C)

TEL :886-3-460-1638

FAX :886-3-460-3820

E-mail : [dsnfg02452@gmail.com](mailto:dsnfg02452@gmail.com)

Website:<http://www.rc-drh.com.tw>

南區營業所:台南縣永康市中正北路54號5樓之13

TEL:06-2434092

FAX:06-2434093