




型號：RC-X0802

Dimension	Dia 8 mm	
Detecting Distance	2mm	
Standard Object	Iran 8x8x1t	
Setting Distance	0-1.6 mm	
Degree Of Protection	IP 67	
Indicator	RED LED	
Protection Loop	ReverseProtection Loop	
Operating Temperature	-25°C to + 70°C	
Operating Humidity	39 to 95% RH	
Power Supply	10 - 30V DC	
Output	NPN NO/NC PNP PO/PC	
Current Consumption	10mA Max	
Load Current	200mA Max	
Response Frenquency	1Hz	
Housing Material	Nickle plated copper	
Wire Material	PVC	PVC Oil resistance
Weight	41 g	

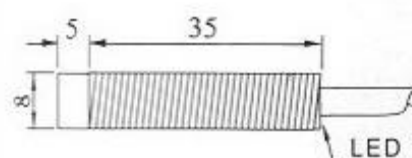

RE CHENG HSU AUTOMATIC INDUSTRIAL CO.,LTD

Address:NO.10.Lane 271,sec. 2 Pingdong Road.,  
Pingjhen City,Taoyuan County 324,Taiwan(R.O.C)

TEL :886-3-460-1638

FAX :886-3-460-3820

E-mail : [dsnfg02452@gmail.com](mailto:dsnfg02452@gmail.com)

Website:<http://www.rc-drh.com.tw>

南區營業所:台南縣永康市中正北路54號5樓之13

TEL:06-2434092

FAX:06-2434093